

ARIES 2.0

ENG



The evolution of simplicity



ARIES 2.0

THE EVOLUTION ON SIMPLICITY



Aries 2.0 is ideal especially for who wants to take extreme care of the clients' cars, a car-dealer for example. Customizable by a **wide range of accessories**, the Aries 2.0 perfectly fits your goals. **Not always, expensive means better.**

Aries 2.0 is the entry-level in the Ceccato range that summarizes three important values: **flexibility in the configuration, easy to operate and maintain, inexpensive.**


Aries 2.0 guarantees an **exceptional relationship between quality and price** thanks to the lowest maintenance costs on the market and to the extremely high reliability.

WASHING PERFORMANCE ARIES 2.0

Profitable starting from

300 washes/month up to 1200 washes/month

MAIN ACCESSORIES

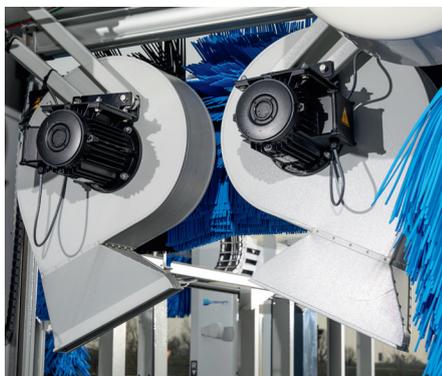

DRYING SYSTEM

The dryers are operated by a simple support and **they prove to be very quiet** because developed to move a big volume of air at very low rounds per minute. The effectiveness of this drying system, **related to the productivity required from this machine**, enables a very good drying quality even with only two dryers. **This brings less energy consumption and less noise pollution.**

WHEELWASHER SYSTEM

The wheelwasher is built inside a plastic designed carter in which, beside giving to the machine a better and more attention grabbing look, **preserves the mechanic parts from external factors and eventual damages.**




PRE-WASHING SYSTEM

The pre-washing system is operated by the usage of **arches with nozzles, in which emollients and water are sprayed at medium pressure.** The arches are embedded in the structure of the machine and hidden by pre-galvanized and powder coated plates.

BRUSHES MOVEMENT

The movement and the control of the brushes are operated by a **SWING system**, developed and patented by Ceccato. This system is known for its combination of price, performance and maintenance simplicity.

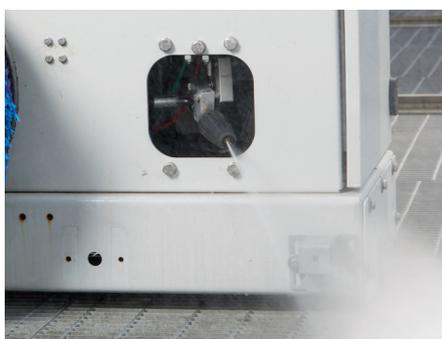

ROBO WASH

The Robo Wash is a rotating nozzle installed in both sides of the machine near the wheelwasher. The water sprayed in high pressure **helps to remove the dirt on the lower part of the car but especially in the wheel cavity.**

POSSIBILITY TO INSTALL FOAM TECH BRUSHES

GANTRY STRUCTURE HOT DEEP GALVANIZED

DOUBLE TWIRLING SYSTEM

TECHNICAL DATA

The machine can be equipped with these brushes: POLYETHYLENE and FOAM TECH

	Dimensions	
	mod. 240	mod. 285
Width with wheelwasher	3660*	3960*
Width without wheelwasher	3380*	3680*
Length	1600*	1608*
Height	3130	3585
Rails gauge	2800/(2500)	3100/(2800)
Max vehicle width	2040	2340
Max vehicle height	2350	2800
Washing width	2400	2700

* without splashguards, with still brushes



Technical data are subject to variations; the Manufacturer reserves the right to update the documentation, without any obligation to inform the customer about the changes. Pictures are not binding – for information only – subject to technical changes without prior notice.

CARATTI POLETTO ADV



Ceccato S.p.A.
Via Selva Maiolo 5/7
36075 Alte Ceccato
di Montecchio Maggiore
Vicenza - Italy

t +39 0444 708 411
f +39 0444 708 405
info@ceccato.it
www.ceccato.it